

SOLAR LED LIGHT

INPAVIMENTO



Cod. SP#0007 Single - LED Yellow Flash
Cod. SP#0008 Single - LED Red Flash
Cod. SP#0015 Double - LED Yellow Flash
Cod. SP#0014 Double - LED Red Flash
Cod. SP#0009 Circular - LED Yellow Flash
Cod. SP#0004 Circular - LED Red Flash

Cod. SP#0016 Single - LED Yellow - On
Cod. SP#0017 Single - LED Red - On
Cod. SP#0018 Double - LED Yellow - On
Cod. SP#0019 Double - LED Red - On
Cod. SP#0020 Circular - LED Yellow - On
Cod. SP#0021 Circular - LED Red - On




Features:

- Built-in solar panel and rechargeable battery for maintenance free system.
- LED diode for long operating life.
- No re-lamp required.
- No maintenance required.
- The lamp only needs 2-4 hours of exposure in the sun/light to be fully recharged.
- It can work for 100 hours when recharged a 100%.
- Rugged, low profile and smooth surface glass fixture, withstands great static load.
- Available with single/double or circular-side illuminating configurations.
- Installation in the ground/surface.
- Immediate function.
- High visibility, up to 100 meter, at night and under the worst weather conditions.
- Ip66

Applications:

- Pedestrian crosswalk.
- Airport Taxiway.
- Curved roadway.
- For signaling stairs/gangways for outdoor concerts and performances.
- Division indicator for traffic directions.
- Bicycle track.

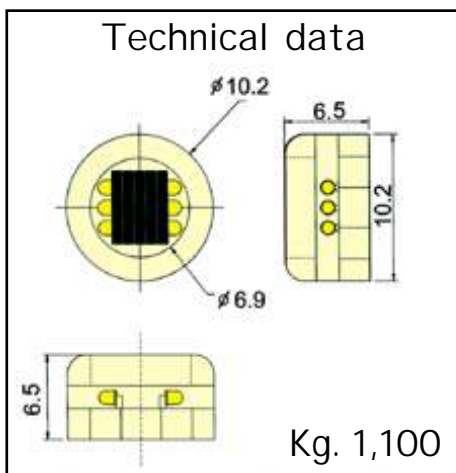

Technical specifications		
Solar Panel	Type	Single-crystal silecon
	Voltage	2.5 V
	Current	119 mA
	Dimensions (cm)	5.4 x 4.3
Battery	Material	Nichel-Cadmio
	Voltage	1.2 V
	Current	1800 mA
LED	Diameter	10 Ø
	N°LED	3 o 6
	Flash rate	300 flash/ min ±20%
	Operation time	At night