


### Halogen lamps, medium/high voltage, single-ended

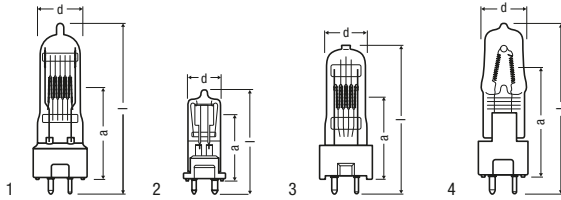

Product name	Product number	ANSI	LIF	W	V	t [h]	lm	K
93591 <sup>1)</sup>	4050300481555	FSY		400	240	75	8000 <sup>3)</sup>	3200
93592 <sup>1)</sup>	4050300481531	FSX		400	230	75	8000 <sup>3)</sup>	3200
64662	4052899015449			300	230	2000	5000	2900
64662	4052899144248		M/38	300	240	2000	5000	2900
64672	4008321098559			500	230	2000	8500	2900
64672	4008321098535			500	240	2000	8500	2900
<b>64686</b>	<b>4052899158269</b>	<b>DYR</b>		<b>650</b>	<b>230</b>	<b>50</b>	<b>16500</b>	<b>3200</b>
<b>64686</b>	<b>4052899158283</b>	<b>DYR</b>		<b>650</b>	<b>240</b>	<b>50</b>	<b>16500</b>	<b>3200</b>

Product name	d [mm]	LCL a [mm]	l [mm]	Hand icon	Eye icon	Base icon	Label icon	Box icon	No.
93591 <sup>1)</sup>	20	36.5	77	10.7*12.2	s90	GY9.5	C	24	1
93592 <sup>1)</sup>	20	36.5	77	10.7*12.2	s90	GY9.5	C	24	1
64662	15	46.5	80	9.0*11	Any	GY9.5	D	12	2
64662	17.5	46.5	80	9.0*11	Any	GY9.5	D	12	2
64672	22	46.5	85	12.0*11	Any	GY9.5	D	12	3
64672	22	46.5	85	12.0*11	Any	GY9.5	D	12	3
<b>64686</b>	<b>21</b>	<b>36.5</b>	<b>64</b>	<b>10.0*10 <sup>2)</sup></b>	<b>Any</b>	<b>GY9.5</b>	<b>B</b>	<b>12</b>	<b>4</b>
<b>64686</b>	<b>21</b>	<b>36.5</b>	<b>64</b>	<b>10.0*10 <sup>2)</sup></b>	<b>Any</b>	<b>GY9.5</b>	<b>B</b>	<b>12</b>	<b>4</b>

1) Available on request  
 2) With monoplane filament  
 3) With internal reflector

#### Product features

- Operation at mains voltage: 120 V, 230 V, 240 V
- Color temperature: 2,900 K, 3,000 K (with longer lifespan)
- Color temperature: 3,200 K (for professional film and TV work)
- Color temperature: 3,400 K (for maximum luminous efficacy)

#### Areas of application

- Professional film and TV work