


Halogen lamps, double-ended

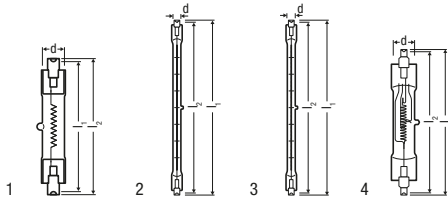

Product name	Product number	ANSI	LIF	W	V	t _h [h]	Im
64571	4050300014180	DXX	P2/13	800	230	75	21000
64571	4050300283388	DXX	P2/13	800	240...250	75	21000
64572	4008321325181		P2/35	1000	230	150	25000
64579	4050300014104	FDG		1000	115...120	15	33000
64580	4050300006888		P1/12	1000	230	15	35000
64580	4050300283173		P1/12	1000	240	15	35000
64583	4050300249094		P2/20	1000	230	300	27000
64583	4050300411477		P2/20	1000	240	300	27000
64741	4050300209333	EKM	P2/7	1000	230	200	25000
64741	4050300283197	EKM	P2/7	1000	240	200	25000
64751	4050300214641		P2/12	1250	230	200	33500
64751	4050300283357		P2/12	1250	240	200	33500
64781	4050300229997	FEX	P2/27	2000	230	300	50000
64781	4050300283500	FEX	P2/27	2000	240	300	50000

Product name	K	d [mm]	l ₁ [mm]	l ₂ [mm]				No.
64571	3200	17	75	78	Horizontal ¹⁾	R7s	50	1
64571	3200	17	75	78	Horizontal ¹⁾	R7s	50	1
64572	3200	18	94	88	Any	R7s	50	1
64579	3200	12	122	122	p15 ¹⁾	R7s	12	2
64580	3400	12	127	122	p15	R7s	12	2
64580	3400	12	127	122	p15	R7s	12	2
64583	3200	10	114	114	Any	R7s	12	2
64583	3200	12	114	114	Any	R7s	12	2
64741	3200	12	186	186	s180	R7s	12	3
64741	3200	12	186	186	s180	R7s	12	3
64751	3200	12	186	186	p15	R7s	12	3
64751	3200	12	186	186	p15	R7s	12	3
64781	3200	30	138	139	p15	RX7s	12	4
64781	3200	30	138	139	p15	RX7s	12	4

¹⁾ Burning position preferably horizontal, vertical possible for a short time

Product features

- Operation at mains voltage: 120V, 230V, 240V
- Color temperature: 3,200K (for professional film and TV work)
- Color temperature: 3,400K (for maximum luminous efficacy)

Areas of application

- Professional film and TV work
- Theater and concert stages

See safety advice no. 5 on page 92