



MSR

MSR 1200 1CT/3

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product data


General Information		Ignition Supply Voltage (Min)	
Cap-Base	G22 [G22]	207 V	
Operating Position	UNIVERSAL [Any or Universal (U)]	Controls and Dimming	
Main Application	Studio/Disco	Dimmable	No
Life to 50% Failures (Nom)	800 h	Mechanical and Housing	
System Description	Cold Strike	Cap-Base Information	30 mm x 53 mm
Light Technical		Luminaire Design Requirements	
Color Code	- [Not Specified]	Bulb Temperature (Max)	700 °C
Luminous Flux (Min)	94000 lm	Pinch Temperature (Max)	350 °C
Luminous Flux (Nom)	110000 lm	Product Data	
Chromaticity Coordinate X (Nom)	325	Full product code	872790091121300
Chromaticity Coordinate Y (Nom)	320	Order product name	MSR 1200 1CT/3
Correlated Color Temperature (Nom)	5900 K	EAN/UPC - Product	8727900911213
Luminous Efficacy (rated) (Nom)	91 lm/W	Order code	928078105114
Color Rendering Index (Nom)	80	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	3
Power (Rated) (Nom)	1200 W	Material Nr. (12NC)	928078105114
Lamp Current (Nom)	13.8 A		

Net Weight (Piece)	0.150 kg
--------------------	----------

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR 1200 1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm

MSR 1200

Photometric data

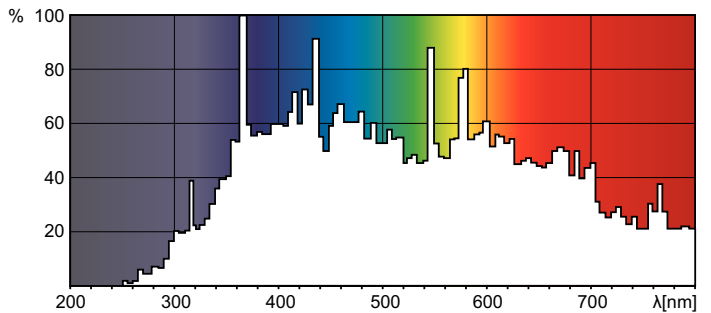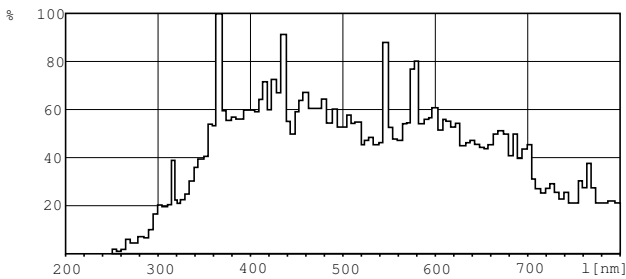

MSR Cold Strike

MSR Cold Strike

