

MSR

MSR 575/2 10H 1CT/4



The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product data

• General Information

Cap-Base	GX9.5 [GX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Disco
Life To 50% Failures (Nom)	1000 h
System Description	Cold Strike

• Light Technical

Color Code	2
Luminous Flux (Min)	39000 lm
Luminous Flux (Nom)	49000 lm
Chromaticity Coordinate X (Nom)	302
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	6990 K
Luminous Efficacy (rated) (Nom)	85 lm/W
Color Rendering Index (Nom)	70

• Operating and Electrical

Power (Rated) (Nom)	575 W
Lamp Current (Nom)	6.95 A

Ignition Supply Voltage (Min)	207 V
-------------------------------	-------

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Cap-Base Information	20 mm
----------------------	-------

• Luminaire Design Requirements

Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	350 °C

• Product Data

Full product code	871829122127200
Order product name	MSR 575/2 10H 1CT/4
EAN/UPC - Product	8718291221272
Order code	928171605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928171605115
Net Weight (Piece)	0.057 kg


PHILIPS

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

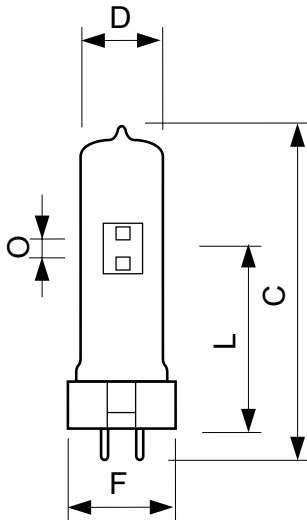


GX9.5

MSR 575/2 10H

Product	D	O	L	L	L	C	F	F	F
MSR 575/2 10H 1CT/4	30 mm	7.0 mm	64 mm	66 mm	65 mm	125 mm	36 mm	35 mm	34 mm



Photometric data

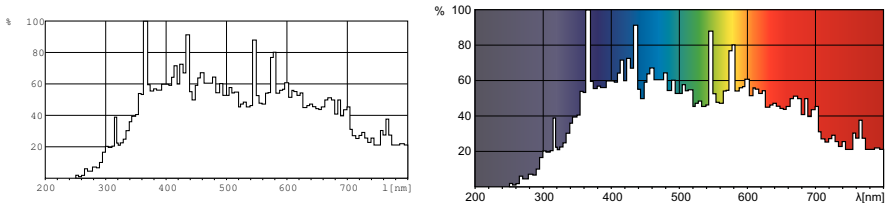



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, May 28
data subject to change