



MSD

MSD 250 1CT/4

These single ended, compact lamps enable optimal light collection and accurate beam control, while they also provide true daylight color temperatures – all to create great stage brightness and vivid entertainment. And since they offer long lifetime usage they help minimize the cost of ownership via fewer lamp replacements and fewer maintenance man hour costs.

Product data

• General Information

Cap-Base	GY9.5 [GY9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Disco
Life To 50% Failures (Nom)	3000 h
System Description	-

• Light Technical

Color Code	- [Not Specified]
Luminous Flux (Min)	15000 lm
Luminous Flux (Nom)	18000 lm
Chromaticity Coordinate X (Nom)	312
Chromaticity Coordinate Y (Nom)	311
Correlated Color Temperature (Nom)	6700 K
Luminous Efficacy (rated) (Nom)	72 lm/W
Color Rendering Index (Nom)	75

• Operating and Electrical

Power (Rated) (Nom)	250 W
Lamp Current (Nom)	3 A

Ignition Supply Voltage (Min)	207 V
-------------------------------	-------

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Cap-Base Information	-
----------------------	---

• Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	350 °C

• Product Data

Full product code	871869641588700
Order product name	MSD 250 1CT/4
EAN/UPC - Product	8718696415887
Order code	928098705115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928098705115
Net Weight (Piece)	32.000 g


PHILIPS

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

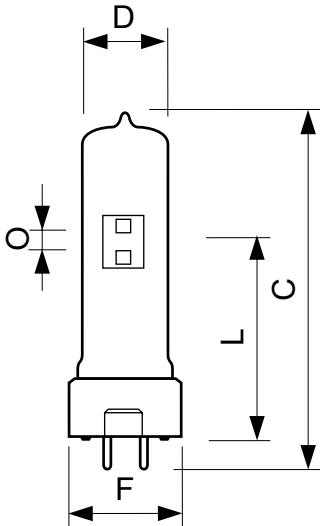


MSD 200(/2), MSD 250(/2)

MSD 250

Product	D	O	L	L	L	C	F	F	F
MSD 250 1CT/4	23 mm	5.0 mm	54 mm	56 mm	55 mm	108 mm	29 mm	28 mm	27 mm



Photometric data

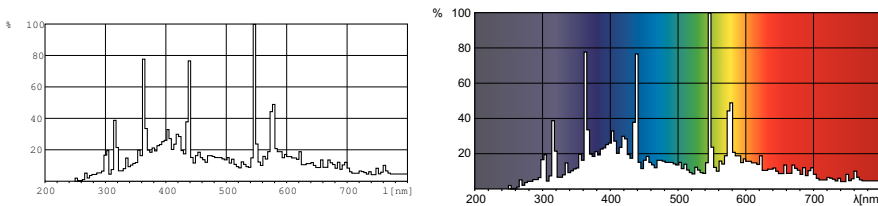



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, May 28
data subject to change