




GE  
Lighting

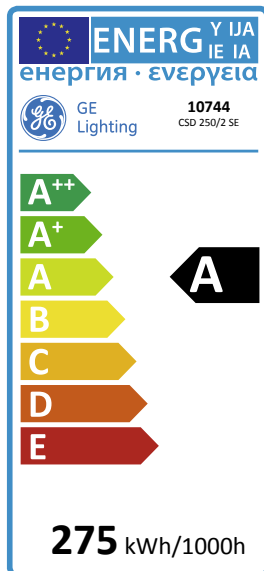

275  
kWh/1000h

A  
energy class

71  
lumens/watt

## Discharge - Single Ended Cold Start

CSD 250/2 SE

# 10744

### Product information

Compact, single ended metal halide cold start lamps for a variety of applications requiring high luminance, reliability and excellent colour characteristics. Excellent colour rendering Ra from 70 – 90+- High CCT 7200 - 9000 K with superior colour stability -Universal burn position -Dimmable with stable colour- High efficiency with excellent lumen maintenance .

### Application areas

Event and Tour



## Product data

Product Code	10744
Bulb Shape	Tubular
Bulb Finish	Clear
Light Center Length [mm]	55
Net weight per piece [g]	32
Gross weight per piece [g]	41
Operating position	U - Universal
Brand	General Electric (GE)
Cap/Base	GY9.5

## Performance data

Colour Code	790
Weighted energy consumption [kWh/1000h]	275
Energy efficiency class (EEC)	A
Nominal chromaticity coordinate X	0.287
Nominal chromaticity coordinate Y	0.296
Nominal correlated colour temperature (CCT) [K]	9000
Nominal lumens [lm]	17700
Colour Rendering Index (CRI) [Ra]	75

## Electrical data

Dimming Capability	No
Ballast Required	Yes
Nominal power [W]	250
Nominal lamp voltage [V]	95

## Logistic data

DUN Code	10043168107447
EAN Code	0043168107440
Pack Quantity	10
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	210 EUR, 520 UK
Layer quantity EUR	210
Layer quantity UK	520
Pallet quantity EUR (PC)	2100
Pallet quantity UK (PC)	2600
Outer case size	240 x 175 x 95 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special Purpose Lamp, Not suited for household illumination