



MSR Hot Restrike

MSR 125 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Information

Cap-Base	GZX9.5 [GZX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Studio/Theatre
Life To 50% Failures (Nom)	200 h
System Description	Hot Restrike

• Light Technical

Color Code	- [Not Specified]
Luminous Flux (Min)	8000 lm
Luminous Flux (Nom)	9400 lm
Chromaticity Coordinate X (Nom)	332
Chromaticity Coordinate Y (Nom)	326
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color Rendering Index (Nom)	92

• Operating and Electrical

Power (Rated) (Nom)	125 W
Lamp Current (Nom)	1.9 A

Ignition Supply Voltage (Min)	207 V
-------------------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Cap-Base Information	-
----------------------	---

• Luminaire Design Requirements

Bulb Temperature (Max)	700 °C
Pinch Temperature (Max)	350 °C

• Product Data

Full product code	871869641492700
Order product name	MSR 125 HR 1CT/4
EAN/UPC - Product	8718696414927
Order code	928060205115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928060205115
Net Weight (Piece)	18.000 g

Prodotti commercializzati da:
AMLUX s.r.l.
 46042 Castel Goffredo (MN)
 info@amlux.it - www.amlux.it

PHILIPS


MSR Hot Restrike

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

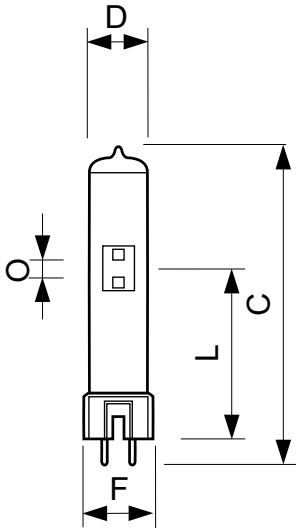



MSR 125 HR

MSR 125 HR

Product	D	O	L	L	L	C	F	F	F
MSR 125 HR 1CT/4	17 mm	4.0 mm	38 mm	40 mm	39 mm	77 mm	24 mm	23.5 mm	23 mm



Photometric data

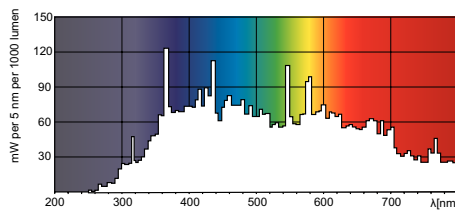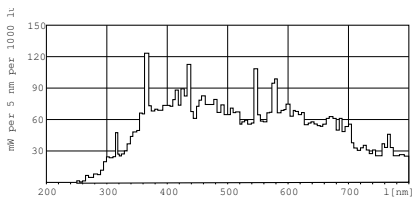

Prodotti commercializzati da:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

Prodotti commercializzati da:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

2016, July 11
data subject to change