



# MSR Hot Restrike

MSR 250 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

## Product data

### • General Information

Cap-Base	GZY9.5 [ GZY9.5]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	TV/Film/Studio
Life To 50% Failures (Nom)	750 h
System Description	Hot Restrike

### • Light Technical

Color Code	- [ Not Specified]
Luminous Flux (Min)	18500 lm
Luminous Flux (Nom)	20000 lm
Chromaticity Coordinate X (Nom)	309
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	80 lm/W
Color Rendering Index (Nom)	90

### • Operating and Electrical

Power (Rated) (Nom)	250 W
Lamp Current (Nom)	2.6 A

Ignition Supply Voltage (Min)	198 V
-------------------------------	-------

### • Controls and Dimming

Dimmable	No
----------	----

### • Mechanical and Housing

Cap-Base Information	-
----------------------	---

### • Luminaire Design Requirements

Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	350 °C

### • Product Data

Full product code	871869641602000
Order product name	MSR 250 HR 1CT/4
EAN/UPC - Product	8718696416020
Order code	928175605115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928175605115
Net Weight (Piece)	32.000 g

Prodotti commercializzati da:  
**AMLUX s.r.l.**  
**46042 Castel Goffredo (MN)**  
**info@amlux.it - www.amlux.it**

**PHILIPS**


# MSR Hot Restrike

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

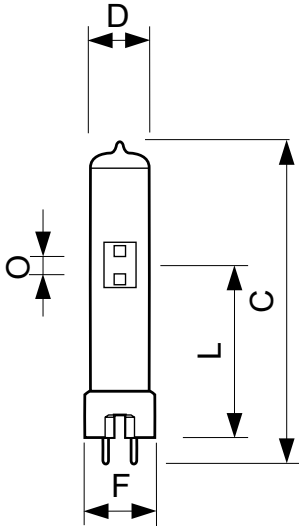



MSR 200 HR, MSR 250 HR

## MSR 250 HR

Product	D	O	L	L	L	C	F	F	F
MSR 250 HR 1CT/4	23 mm	5.0 mm	58 mm	60 mm	59 mm	110 mm	24 mm	23.5 mm	23 mm



## Photometric data

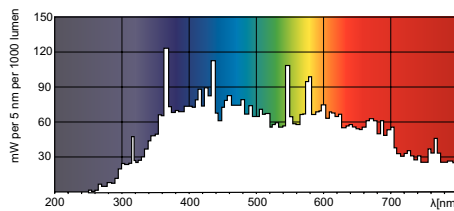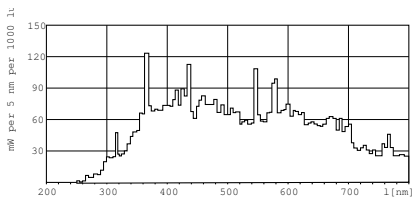

**Prodotti commercializzati da:**  
**AMLUX s.r.l.**  
**46042 Castel Goffredo (MN)**  
**info@amlux.it - www.amlux.it**



© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips).

**Prodotti commercializzati da:**  
**AMLUX s.r.l.**  
**46042 Castel Goffredo (MN)**  
**info@amlux.it - www.amlux.it**

2015, November 29  
data subject to change