



MSR Hot Restrike

MSR 200 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Information

| | |
|----------------------------|-----------------------------------|
| Cap-Base | GZY9.5 [GZY9.5] |
| Operating Position | UNIVERSAL [Any or Universal (U)] |
| Main Application | Studio/Theatre |
| Life To 50% Failures (Nom) | 200 h |
| System Description | Hot Restrike |

• Light Technical

| | |
|------------------------------------|--------------------|
| Color Code | - [Not Specified] |
| Luminous Flux (Min) | 12000 lm |
| Luminous Flux (Nom) | 15000 lm |
| Chromaticity Coordinate X (Nom) | 325 |
| Chromaticity Coordinate Y (Nom) | 323 |
| Correlated Color Temperature (Nom) | 6000 K |
| Luminous Efficacy (rated) (Nom) | 75 lm/W |
| Color Rendering Index (Nom) | 92 |

• Operating and Electrical

| | |
|---------------------|-------|
| Power (Rated) (Nom) | 200 W |
| Lamp Current (Nom) | 3.3 A |

| | |
|-------------------------------|-------|
| Ignition Supply Voltage (Min) | 207 V |
|-------------------------------|-------|

• Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

• Mechanical and Housing

| | |
|----------------------|---|
| Cap-Base Information | - |
|----------------------|---|

• Luminaire Design Requirements

| | |
|-------------------------|--------|
| Bulb Temperature (Max) | 700 °C |
| Pinch Temperature (Max) | 350 °C |

• Product Data

| | |
|---------------------------------|------------------|
| Full product code | 871869641604400 |
| Order product name | MSR 200 HR 1CT/4 |
| EAN/UPC - Product | 8718696416044 |
| Order code | 928097905115 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 4 |
| Material Nr. (12NC) | 928097905115 |
| Net Weight (Piece) | 22.000 g |

Prodotti commercializzati da:
AMLUX s.r.l.
 46042 Castel Goffredo (MN)
 info@amlux.it - www.amlux.it

PHILIPS


MSR Hot Restrike

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

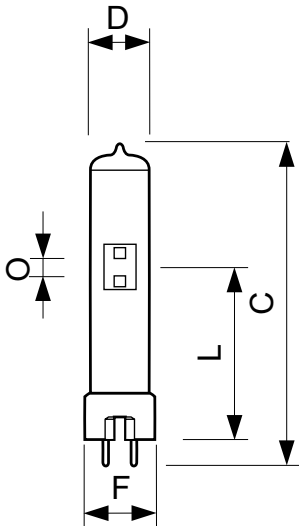



MSR 200 HR, MSR 250 HR

MSR 200 HR

| Product | D | O | L | L | L | C | F | F | F |
|------------------|-------|--------|-------|-------|-------|-------|-------|---------|-------|
| MSR 200 HR 1CT/4 | 20 mm | 5.0 mm | 38 mm | 40 mm | 39 mm | 80 mm | 24 mm | 23.5 mm | 23 mm |



Photometric data

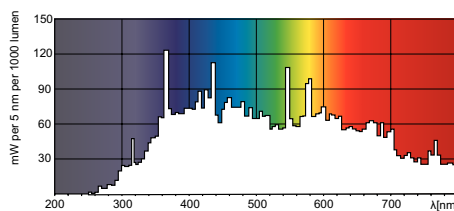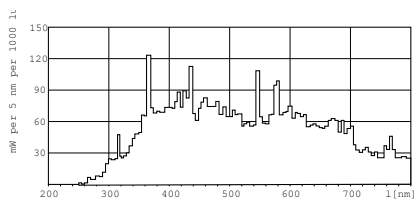

Prodotti commercializzati da:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

Prodotti commercializzati da:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

2015, December 10
data subject to change