



# **CDM**

## CDM-SA/R 150W/942 UNP/1

The perfect color rendering and long life of these Ceramic Discharge Metal-halide lamps make them ideal for fiber optics lighting systems in shop displays, decorative lighting and swimming pool illumination. They can be mounted in color changing projectors.

## **Product data**

General Information	
Cap-Base	CERAMICCAP-CABLE [ Ceramic Cap-Cable (C)]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Fiber Optics
Life To 50% Failures (Nom)	6000 h
Light Technical	
Color Code	942 [ CCT of 4200K]
Luminous Flux (Min)	2200 lm
Luminous Flux (Nom)	2650 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	366
Chromaticity Coordinate Y (Nom)	353
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	16.5 lm/W
Color Rendering Index (Nom)	96
Operating and Electrical	
Power (Rated) (Nom)	159 W
Lamp Current (Nom)	1.76 A
Ignition Supply Voltage (Min)	198 V

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	Cable 250 mm
Luminaire Design Requirements	
Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871150020150800
Order product name	CDM-SA/R 150W/942 UNP/1
EAN/UPC - Product	8727900783490
Order code	928086805303
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928086805303
Net Weight (Piece)	0.192 kg


Prodotti commercializzati da: AMLUX s.r.l. 46042 Castel Goffredo (MN) info@amlux.it - www.amlux.it

## CDM

### Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




 Product
 D (max)
 X
 C (max)

 CDM-SA/R 150W/942 UNP/1
 95.3 mm
 280 mm
 106 mm

### Photometric data

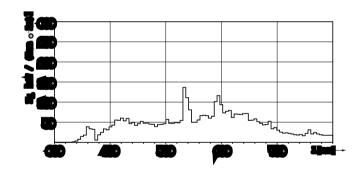

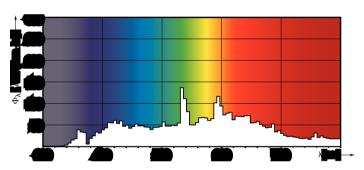

CDM-SA/R 150W/942

CDM-SA/R 150W/942

