

## EU-01-12

IP-profile | driveable | U-high for **12 - 12,3mm LED-Stripes**

### Information

- two different lenght: 1m/2m
- aluminium natural
- profile width: 27mm
- profile height: 30mm
- high quality aluminium profile
- high dimensional accuracy
- driveable
- provided for protection class IP67

### Advantages


- small in size
- easy installation
- can be easily shortened
- high quality modern and timeless design
- for the use of rigid and flexible LED strips
- protection of LED Stripes by external influences
- homogeneous lighting effect, no dazzle with the correct cover
- passive cooling of the LED stripe, whereby the lifetime of LED stripes can be extended
- continuous quality control, environmentally friendly


### Mounting

- mounting glue, tile adhesives, concrete, mortar
- driveable max. 1 ton, we recommend our foam carrier
- Mounting (partly available on page 144/145)

### Application

special and ideal for driveways, parking lots and cobblestone paths | terrace | building facades | light line marking | pools | indirect lighting | accent lighting | architecture

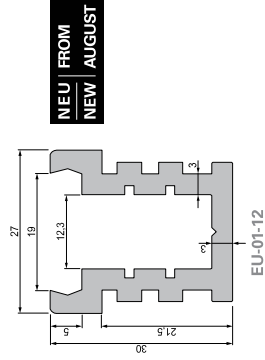

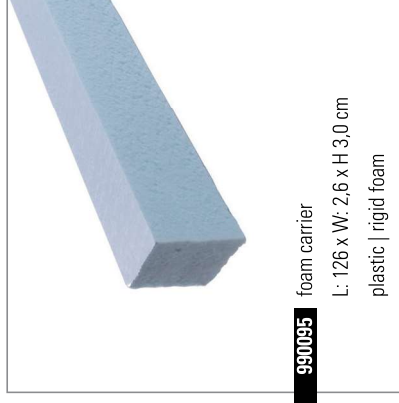


Installation material see page 144 | 145

### accessories for profile EU-01-12

#### cover

I - 02 - 12 IP



#### end caps

40% milky



988054 1m  
988055 2m

grey



981021  
set, 2 pieces