

1226300029



FLASH KLING PANEL 64



Specification

- Light Source: 64 x SMD RGB LED's (8x8 Matrix Configuration)
- LED Pixel panel for, low resolution, video displays
- 120-Degree Beam Angle
- Operational Mode: KlingNet and ArtNet compatible. Recommended control solutions; Arkaos Media Master Express, Media Master Pro and LED Master software's (sold separately).
- Link up to 100 Flash Kling Panel 64's
- Power Connection: IEC AC In/out
- Power Consumption: 20W (Full On)
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 19.75" x 19.75" x 2.5" in. / 500 X 500 X 63mm
- Weight: 12 lbs / 5.6 kgs

Panel Lock for Flash Kling Panel 64 -Code: 1226300030


RGB Color Mixing:



1222300016



ULTRA KLING BAR18

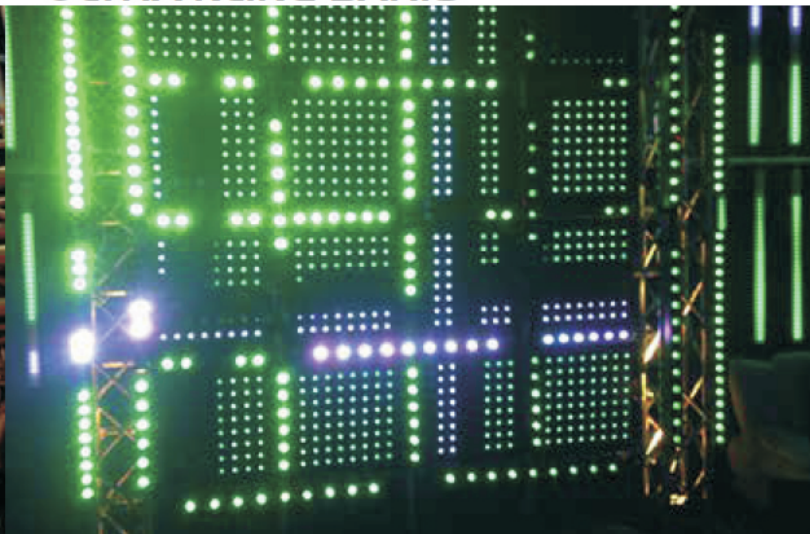

Specification

- Light Source: 18x 3W Tri LEDs Pixel Bar
- 5 Operational Modes: DMX, Sound Active, Auto, Kling Net, Master/Slave
- DMX Channel Modes: 3, 4, 6, 8, 9, 15, 54; 3-pin In/Out
- Built-In Programs & Color Macros
- RJ45 In/Out Kling Net & Art Net
- Electronic Dimming 0-100%
- Kling Net & Art-Net Control available
- Individual Pixel Control
- Power Consumption: 98W @ full on
- Power Connection: IEC AC In/out
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 43.5" x 3.25" x 4.5" in. / 1100 X 80 X 116mm
- Weight: 13 lbs / 6 kgs

RGB Color Mixing:



Photometric

R	712	318	161	105	67	(LUX)
G	696	283	147	85	52	
B	638	291	138	79	48	
RGB	1750	816	393	239	157	

