




Remote Included

VPAR PAK

1226100280

DOTZ TPAR SYSTEM

1223200031

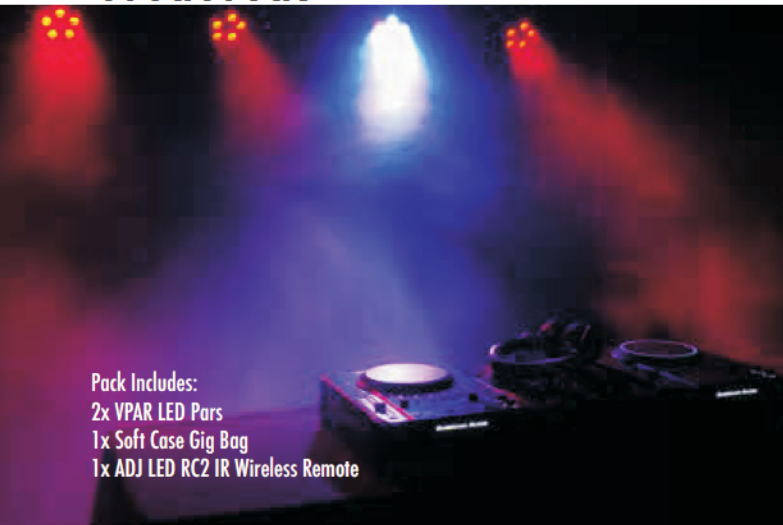

Pack Includes:
 2x VPAR LED Pars
 1x Soft Case Gig Bag
 1x ADJ LED RC2 IR Wireless Remote



Specifications:

- Ultra bright slim flat black Par with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA) – casts no RGB shadows
- Smooth RGBA Color Mixing (fast or slow color change operation)
- Unique "sit-flat" design: Power & DMX Ins/Outs intelligently designed so the unit can be set flat on the ground or set inside truss
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 channels
- 5 Operational modes: RGBA Dimmer mode, sound active mode, static color mode, auto run mode (3 auto run modes), and DMX Control
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- DMX-512 protocol
- Color strobe effect
- Linkable via 3-pin XLR cable
- Electronic Dimming: 0-100%
- Flicker Free
- Includes a scissor yoke to hang on truss, mount on a wall or set on the ground
- Long Life LEDs (50,000 hrs.)
- Power Draw: 21W Max
- IEC AC input and out put on the side of the fixture to daisy chain the power cords (link up to 30 fixtures)
- Compatible with ADJ LED RC2 wireless infrared remote control up to 30 ft./ 10M (included in the pak)
- Multi-voltage operation: AC 100V-240V 50/60Hz
- Dimensions (LxWxH): 225 x 220 x 85mm
- Weight: 1.2 kg.
- VPAR Gig Bag inner dimensions (LxWxH): 225 x 200 x 240mm
- System Weight: 3 kg.

Specification

- Light Source: 4 X 30W COB Tri RGB LEDs In separate adjustable fixtures
- Portable Wash/ Blinder stage lighting system with stand, travel bag, and foot controller
- Standard 90° or 25° kit included to adjust beam angle; 15 exciting built in programs
- DMX Modes : 3,6,7,12, or 18 channels: 3 PIN DMX In/Out
- Multi Voltage operation: AC 100-240V 50/60 Hz (IEC Input)
- Power Consumption: 1.31 Amps @ 110V; .65 Amps @ 220V
- System Dimensions (LXWXH): 39.5" x 12.75" x 3.25" / 1000 x 320 x 82mm
- Weight: 35 lbs / 16kg



Photometric

Beam Angle ■ 25°	R	2400	749	360	206	138	(LUX)
	G	2760	904	427	249	161	
	B	4130	1357	646	96	246	
	RGB	8650	2680	1345	372	506	
	Spot Diameter	0.65	1.08	1.83	1.97	2.41	

Field Angle ■ 30°	R	2400	749	360	206	138	(LUX)
	G	2760	904	427	249	161	
	B	4130	1357	646	96	246	
	RGB	8650	2680	1345	372	506	
	Spot Diameter	0.83	1.45	2.10	2.70	3.35	

