




**COB CANNON WASH/PEARL**



**COB CANNON DW**

1223200045

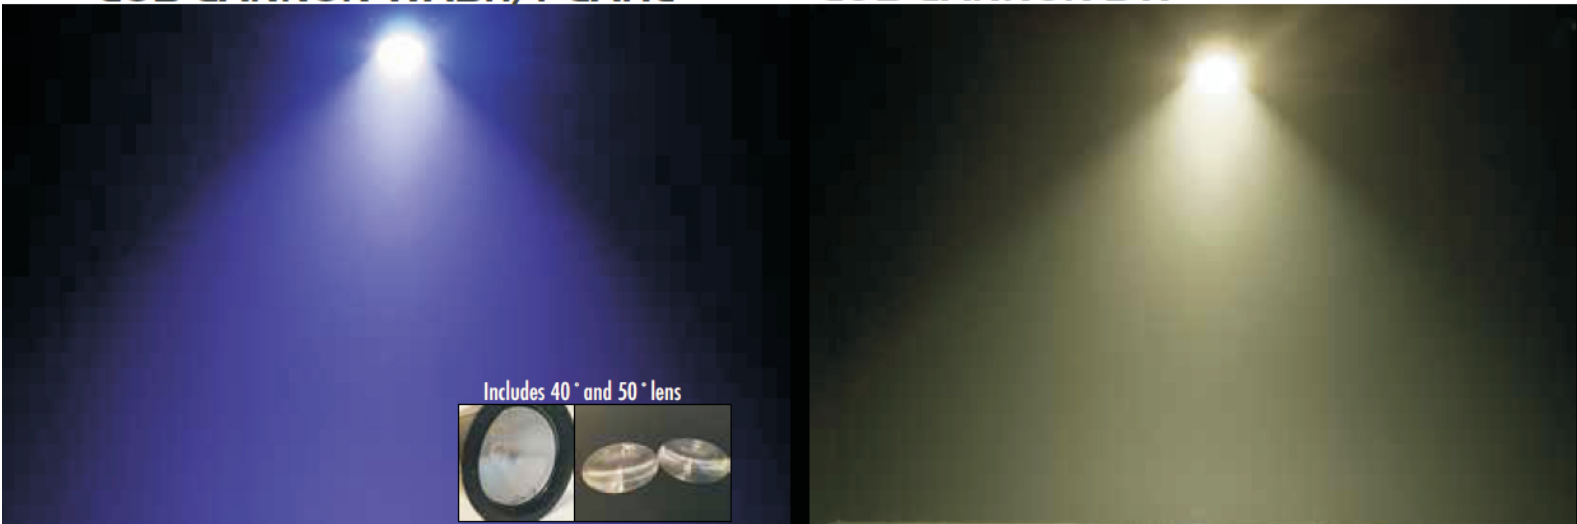

**Specification**

- Light Source: 1x 150-Watt COB Quad LED (RGBA: 4-IN-1, rated at approximately 50,000 hrs)
- Use as Wash/par or Pixel Mapped for a stunning visual effect
- 7 DMX channel modes (3, 4, 5, 6, 7, 9, 10 ch.)
- Built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- 80-degree beam angle
- Includes lens kit to change to 40-degrees or 50-degrees beam angle
- Compatible with wireless remote control ADJ RFC (sold separately)
- 3-pin XLR chassis mount connectors for DMX linking
- 3 & 5-pin XLR DMX IN/OUT
- Powercon In/Out
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz
- Dimensions (LxWxH): 16.5"x9.75"x7.75" / 415x245x192mm
- Weight: 9 lbs. / 4.1 kg.



**Specification**

- With one WW/CW COB LED
- COB Technology (Chip On Board) produces powerful, smooth Dynamic White mixing
- 150w ww/cw COB
- Built-In preset colors and programs
- Flicker Free operation (No flickering on camera)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Beam angle: 40-degrees & 50-degrees with supplied lens kit
- 3-pin XLR chassis mount connectors for DMX linking
- Power Con in/out to daisy chain power
- 4-button digital DMX display on rear panel
- Compatible with wireless remote control (sold separately)
- Single yoke allows fixture to be mounted
- Approximately 50,000 hrs
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz

**Photometric**

Beam Angle deg	0.4375	0.875	1.75	2.625	3.50	4.375	
R	10650	2530	611	289	168	111	(LUX)
G	8490	1869	511	226	130	91	
B	8540	1950	545	242	135	95	
A	3110	997	253	113.8	61.1	39.1	
RGBA	25900	7320	1970	810	474	297	

Beam Angle deg	0.53	1.06	2.12	3.18	4.24	5.30	
R	5780	1475	393	170.8	98.5	65.4	(LUX)
G	4780	1360	335	154.4	90.5	58.8	
B	4800	1454	372	172.8	96.4	64.9	
A	2480	892	191	85.4	48.8	31.4	
RGBA	24300	6240	1472	681	373	240	

Beam Angle deg	1.01	2.02	4.04	6.06	8.08	10.1	
R	3600	975	247	112.5	66.3	44.7	(LUX)
G	3650	853	219	103.8	60.5	39.1	
B	3690	928	248	110.4	65.9	42.5	
A	2350	689	159.3	67.9	37.2	25.1	
RGBA	12360	3590	999	549	298	159.9	

