

## ECO UV BAR DMX

1224100005

### Specification

- Light Source: 18 x 3W High Output Ultra Violet LED
- Black light effect in a linear fixture with DMX control
- 3 DMX Channels ; 3 Pin DMX IN/Out
- 120° beam angle; Built in programs, Strobe, Pulse effect
- IEC AC In/Out (Power daisy chain 10 units @110V, 15 units @220V)
- Power Consumption: .47 Amps @ 110V; .24 Amps @ 220V
- Dimensions (LxWxH): 39.5" x 2.5" x 4.75" / 1000 x 60 x 115mm
- Weight: 5 lbs/ 2.3 kg





## ECO UV BAR 50 IR

1214100003

### Specification

- Bright, high output ultraviolet bar with 9x 3-Watt UV LEDs
- Great for performance stages, theatrical productions and special effects installations
- On/Off switch on rear panel
- Beam Angle: 120-degree
- LED Strobe effect
- Adjustable mounting brackets for wall/ceiling mount or to set on the floor for wall washing
- Includes UC-IR Remote (Control: On/Off and Strobe Speed)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Draw: 30W
- Multi-voltage operation: AC 100V-240V 50/60Hz
- Light Source: 9x 3-Watt UV LEDs
- Wavelength: 390-410nm
- Dimensions (LxWxH): 19.75" x 2.5" x 4.5" / 500 x 60 x 115mm
- Weight: 3.2 lbs. / 1.44 kgs

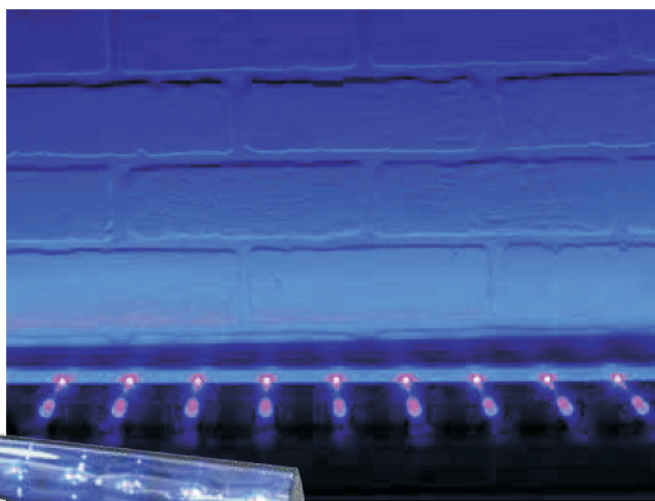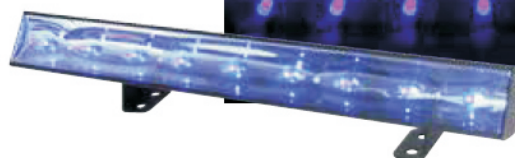

## ECO UV BAR PLUS IR

1214100004

### Specification

- Bright, high output ultraviolet bar with 18x 3-Watt UV LEDs
- Great for performance stages, theatrical productions and special effects installations
- On/Off switch on rear panel
- Beam Angle: 120-degree
- LED Strobe effect
- Includes mounting brackets for wall/ceiling mount or to set on the floor for wall washing
- Includes UC IR Remote (Rev. Nov. 2016)
- IEC Power In/Out with pigtails (Rev. Nov. 2016)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Draw: 60W
- Multi-voltage operation: AC 100V-240V 50/60Hz
- Light Source: 18x 3-Watt UV LEDs
- Wavelength: 395-405nm
- Dimensions (LxWxH): 39.5" x 2.5" x 4.5" / 1000 x 60 x 110.5mm
- Weight: 6 lbs. / 2.4 kgs

