



Accenditore per ballast elettronico
Electronic Ballast ignitor
MADE IN ITALY

Code AC#1250004

Lampade testate/ Tested lamps:

300W : MSR Gold 300/2 FastFit Philips

400W : UV-Hight Pressure Lamp Ultramed 400 OSRAM

575 W: HSR 575W/72 GX9,5 10X1 OSRAM, HMI 575W/SEL OSRAM, MSR GOLD 575/2 MiniFastFit PHILIPS, HSR 575 W/60 OSRAM, MSR 575/2 10H 1CT/4 PHILIPS

700 W: MSR 700SA 1CT PHILIPS, MSR Gold 700/2 FastFit PHILIPS

1000W: MSR Gold 1000 MiniFastFit 1CT/4 PHILIPS, Lok-it! HTI 1000/PS OSRAM

1200W: HMI 1200 W/GS OSRAM, Philips MSR GOLD SA/SE

1500W: SharXS HTI 1500 W/D7/60 OSRAM, HTI 1500w/60/P50 Lok-it! OSRAM, MSR Gold 1500 FastFit PHILIPS

2500W: MSR 2500 HR 1CT PHILIPS


Potenza / Power	da 300 a 2500 W
Corrente nominale / Rated current	25 A
Tensione di picco / Peak voltage	5 - 6 Kv
Temperatura ambiente / Amb.temperature	75°C
Peso totale / Total weight	0,27 Kg.
Certificazioni disponibili / Available certifications	CE



Dimensioni/Dimension:

H: 8,5 cm, ø 4,7 cm

Diagramma di collegamento/Wiring diagram

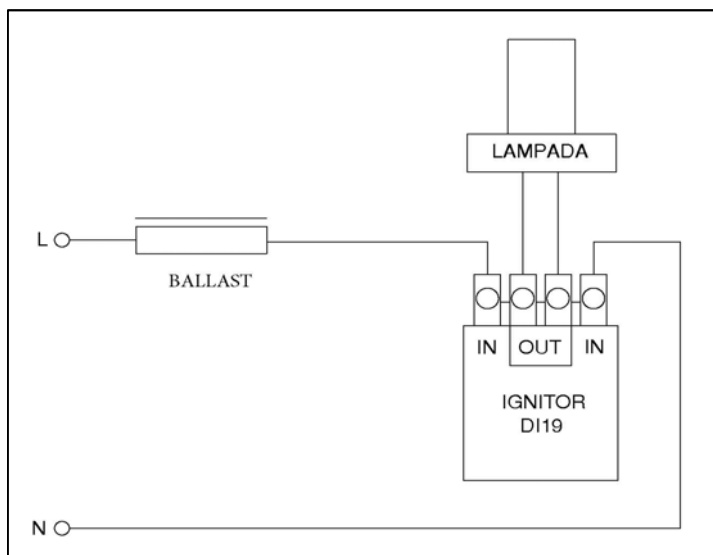

AMLUX s.r.l.

Via Belgio,11/13 46042, CASTEL GOFFREDO (MN)

Tel. +39 0376/781094 Fax. +39 0376/781095