

DIMMER 6 CANALI DMX

Dimmer pack 6 channels DMX



Funzioni:

- 6 canali DMX con possibilità di indirizzare ogni singolo canale
- 12 Scene pre-programmate, dimmer e velocità regolabili
- Protezione sui circuiti contro sovraccarichi o cortocircuiti
- Correzione della Fase per un dimmer più lineare selezionabile da linear/switch/square
- Lavora in analogico senza regolazione aggiuntive
- Display a cristalli liquidi indica tutte le funzioni, come ad esempio: preriscaldamento, programmi, ingresso/uscita.
- Errore di memoria, di alimentazione, ventola di raffreddamento

Functions:

- 6 channel dimmer pack with separate DMX addressing per channel
- 12 chase programs can be recalled, chase speed is adjustable
- electronic protection against overheating and short circuits
- phase correction for linear dimming, selectable from linear, switch, square
- analogue input works without any adjustment
- the short circuit protection for each channel with the use of 10A circuit breaker
- LC Display indicates all functions like e.g. preheat, programs, input/output signals
- power failure memory, fan cooled

6 Channel


DMX 512

12 Chase

Setting Manual

DATI TECNICI	TECHNICAL DATA
Dimensioni: 482 x 325 x 88 mm	Dimensions (LxHxB) 482 x 325 x 88 mm
19" 2U rack	19" 2U rack
Peso: 8,0 kg	Weight 8,0 kg

20A channel
120A total
Terminal

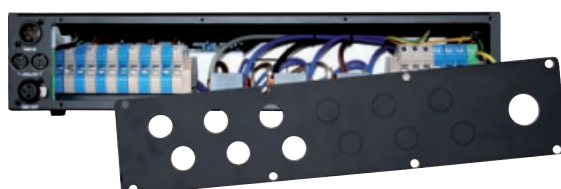

12050 DPX-620 III TERMINAL-VERSION
CODE DM#0600202

16A channel
96A Total
6 x Schuko



12052 DPX-620 III 6 X SCHUKO-VERSION
CODE DM#0600203

DIMMER DPX-620 AMLUX

CODE SRC-134

Funzioni:

- 6 canali DMX con preriscaldamento
- 6 fader frontali per controllo manuale
- Protezione automatica per ogni canale
- morsettiera sul retro
- Indirizzo DMX tramite Dipswitch

Functions:

- 6 channel dimmer pack with preheating
- 6 fader on front dimmer for manual controller
- Automatic circuit breakers per channel
- Terminal block (pole connection)
- DMX addressing on DIPswitch

DATI TECNICI	TECHNICAL DATA
Dimensioni: 482 x 325 x 88 mm	Dimensions (LxHxB) 482 x 325 x 88 mm
19" 2U rack	19" 2U rack
Peso: 8,0 kg	Weight 8,0 kg

20A channel
120A total
DMX 512
6 Fader

