



**ASTEROID I200**



1237000136



AIRSTREAM IR  
1226100319

**NINJA 5RX**

1237000137

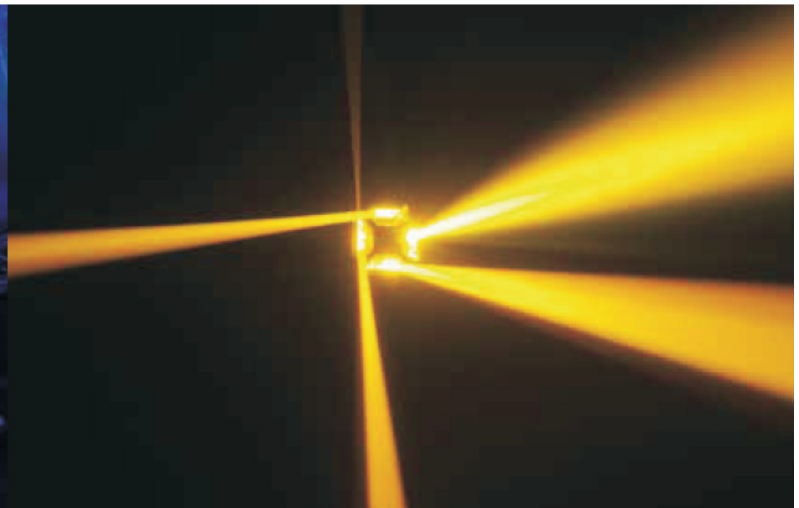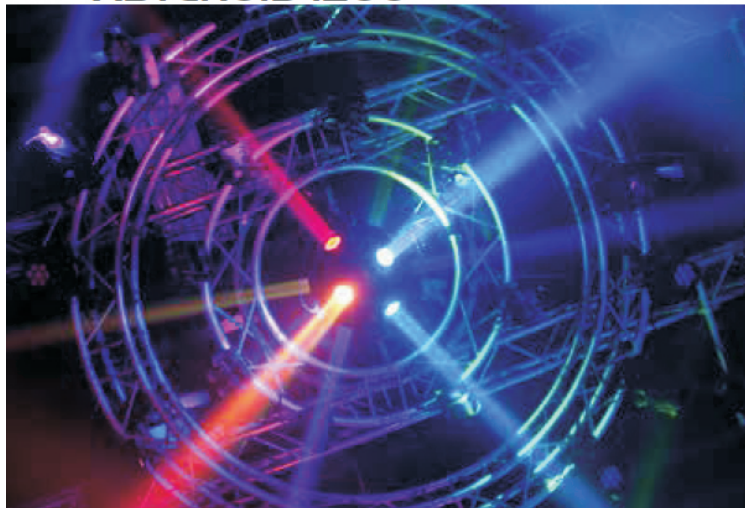


**Specification**

- Infinite Pan and Tilt rotation in both directions
- Advance lens optics eliminates RGBW shadows
- 4-degree beam angle produces sharp beams of light
- Pixel Mappable capability via DMX, Artnet or KlingNet
- Powercon Connections In and Out
- Light source: 12 X 15W RGBW (Red, Green, Blue, White) 4-IN-1 LED Engine
- Lamp Life: 50,000 Hrs
- Lux: 39,749 max; 9056 Full on @ 2M
- Beam Angle: 4-degree Fixed, 11-degree (Field Angle)
- Operational Modes: Artnet/KlingNet, DMX, Sound Active, Stand Alone, Master/Slave
- DMX Modes: 18, 20 or 64 Channels
- DMX Connection: 3-pin and 5-pin
- RDM compatible
- Strobe: Electronic 1Hz-20KHz
- Edit and save scenes into internal memory (9 programs with 64 steps, 250 scenes in total)
- Dimming: Electronic 0-100%, 5 selectable dimming curves
- Pan/Tilt: Infinite
- Power Connections: Powercon In / Powercon Out
- Power Draw: 226W Max/ Voltage Input: 100-240V, 50/60Hz
- Weight: 22Kg
- Dimensions 400 x 450 x 600mm

**Photometric**

R	13024	2836	1288	691	433	(LUX)
G	22173	3111	1976	1103	694	
B	3318	700	294	157	100	
WW	30095	5736	2406	1342	822	
RGBWW	39749	9056	3649	1957	1193	



4" Diameter(m)	0	1.0	2.0	3.0	4.0	5.0
11" Diameter(m)	0	0.06	0.15	0.24	0.33	0.41
	0	0.19	0.37	0.54	0.72	0.89

**Specification**

- Light Source: Philips® MSD Platinum 5R discharge, 8,000 ° K – 3,000 hr. long life
- 3 Operating Modes: Show Mode (12 Shows), Sound Active Mode, & DMX Control
- 3 DMX Channel Modes: 1, 10, or 13 DMX channels
- Colors: 15 colors
- Gobos: 17 static, fixed gobos + open
- Independent gobo and color wheels / Tilt Invert / Built-In Tilt Macros / Shutter: Pulse effect; random strobe slow to fast / Mechanical Dimming: 0% - 100% / Strobe effect
- 4 high speed stepper motors with individual control
- Compatible with all UC IR wireless remote (sold separately), and Airstream IR
- Power Draw: 260W
- IEC in/out to Daisy Chain Power (Connect up to 2 fixtures max @ 120V, up to 5 fixtures max. @ 230V)
- Dimensions (LxWxH): 340x313x333mm / 13.25" x 12.25" x 13"
- Weight: 10 kg. / 22 lbs

**Colors / Gobos**

