

VD LED 250 WW DMX



Luminaire: Followspot, LED, 250W, WW
zoom 08°-19°, 3200K, DMX control



Type

Green line

Family

Followspot

Source

LED Warm White

Power

250W

Control

DMX-RDM

Colour temperature

3200K

Cri

> 95

Connectors

Powercon® In&Out

Voltage

90-260V, 50-60Hz

Product sizes

17Kg

Pack sizes

335mm x 1205mm x 355mm

22.9Kg

0.143m³

DWG

Available on website

Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Adjustable forced ventilation
- Filter frame lockable top cover
- Gobo-holder slot
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing


Functional features

- LED temperature range control to guarantee the best performances
- Constant colour temperature during the whole dimming curve
- Silent mode function
- Zero to Full dimming with pre-loaded dimming curves
- Flicker-free mode with adjustable PWM LED frequency for best use with cameras
- Strobe function with adjustable frequency
- Master/Slave mode
- Remote controllable functions via DMX-RDM
- 8/16 bit control mode on all channels
- Cooling system with high performance heat pipes

Green line advantages

- No dangerous UV or IR rays for the safe lighting of the people and objects
- No radioactive or mercury-based components
- Nearly 75% saving on mains power consumption if compared to an equally-performing conventional fixture
- Reduced installation and cabling costs thanks to the In&Out chain connection system both for power mains and DMX/DALI data control
- Savings on running costs thanks to the extended lifespan of the LED source compared to the periodical replacement of conventional bulbs
- Savings on the air-con set up and supply, thanks to the lower heat emission of the fixtures
- No maintenance costs for the replacement of colour filters due to overheating and damage

Sizes (in mm)

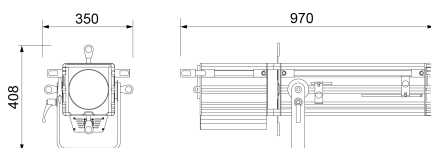

Accessories

| | |
|--------------|---|
| BS | Acc: Low stand, DIN, lazy leg |
| CGP2 | Acc: 3-section Wind-Up Stand, lazy leg |
| CMA 12 E | Acc: Manual 6-colour colour changer |
| CTRL 6CH MEM | Acc: 6-ch DMX console with memories |
| DIN P 10 | Acc: TV spigot / M10 adapter with plate |
| RF | Acc: Wheel set with brake |