



DT 34/3

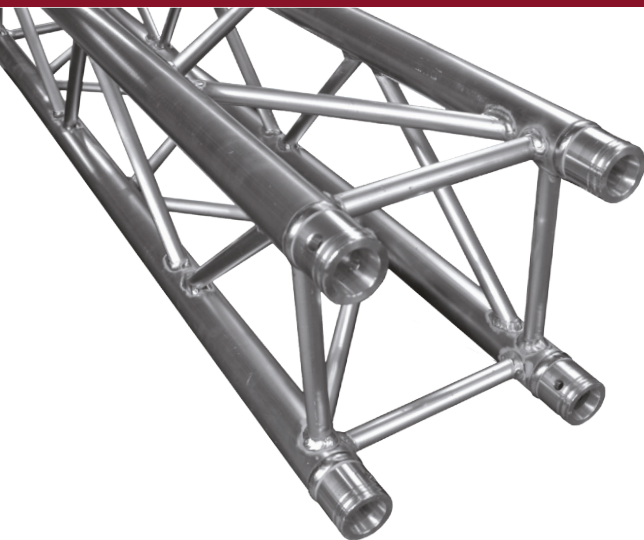

Ø 50mm

DT 34/3-050

Code: 1724100051

■ 500mm ■ KG 5,4

DT 34/3-100

Code: 1724100052

■ 1000mm ■ KG 8,2

DT 34/3-150

Code: 1724100053

■ 1500mm ■ KG 11,2

DT 34/3-200

Code: 1724100054

■ 2000mm ■ KG 14,3

DT 34/3-250

Code: 1724100055

■ 2500mm ■ KG 17,1

DT 34/3-300

Code: 1724100056

■ 3000mm ■ KG 20,4

DT 34/3-350

Code: 1724100057

■ 3500mm ■ KG 23,5

DT 34/3-400

Code: 1724100058

■ 4000mm ■ KG 26,2

DT 34/3-450

Code: 1724100059

■ 4500mm ■ KG 29,2

DT 34/3-500

Code: 1724100060

■ 5000mm ■ KG 33,2



Compatible to DT 34 | DT 34/2 | D34/4.

The difference in the DT 34/X series is the pipe wall thickness and the resulting load.


DT34/3 Tube diameter: 50mmx3mm (2 x 0.12 inch)



LOAD CHART - EN-1090 - EUROCODE

Length (m)	1	4	6	8	10	12
Point load (kg)	2840	1554	1033	771	607	491
Deflection (mm)	2,7	11,7	26,7	48,3	76,2	110,1
Distrib. load (kg/m)	1420	707	344	193	121	82
Deflection (mm)	1,7	13,3	33,2	59,8	93,9	134,8

LOAD CHART - EN-1090 - Eurocode

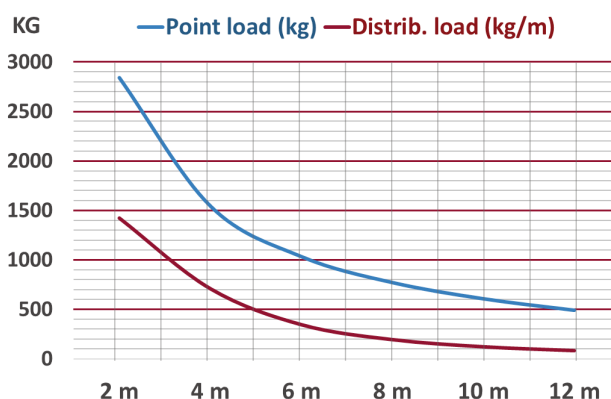


TECHNICAL DATA


Tube diameter: 50mmx3mm (2 x 0.12 inch)
 Cross brace diameter: 20mmx2mm (0.8 x 0.08 inch)
 Material: Alloy EN-AW 6082 T6 (AlMgSi1 T6)



FOUR TUBE SYSTEM




DT 34/3-C21-L-90
CODE: 1724100061




2 way corner 90°
L 500mm **W** 500mm **H** 290mm
KG 7,3

DT 34/3-C30-LD90
CODE: 1724100062




3 way corner 90°
L 500mm **W** 500mm **H** 500mm
KG 10,3

DT 34/3-T35-T
CODE: 1724100063




3 way T-joint
L 500mm **W** 500mm **H** 290mm
KG 9,2

DT 34/3-T40-TD
CODE: 1724100064




4 way T-joint + down
L 500mm **W** 500mm **H** 500mm
KG 12,4

DT 34/3-C41-X
CODE: 17241000065




4 way X-joint
L 500mm **W** 500mm **C** 290mm
KG 10,8

DT 34/3-C51-XD
CODE: 1724100066



5 way X-joint + down
L 500mm **W** 500mm **H** 500mm
KG 12,4

DT 34/3-C61
CODE: 1724100067



6 way corner
L 500mm **W** 500mm **H** 500mm
KG 13,6

DT 34-NIVELER FOOT
CODE: 1733000045

