

TRUE BLUE T2 2000W



<u>Part no.</u>	<u>Description</u>
L3.41250.B	manual, blue/silver
L3.41255.B	manual, black
L3.41250.I	pole operated, blue/silver
L3.41250.D	manual, blue/silver with Schuko plug
L3.41255.D	manual, black with Schuko plug

All the above are supplied with four leaf barndoor and filter frame

Accessories

L2.39870.0	Four Leaf Barndoor, black, rotatable, 197mm
L2.39900.0	Eight Leaf Barndoor, black, rotatable, 197mm
L2.79890.0	Filter Frame 197 mm
L2.79880.0	Variable Snoot
L2.88914.0	Set of 4 Scrims (without bag)
L2.88914.1	Scrim bag
L2.88717.0	Cine Stand




Lamps

64789 OSRAM	2000W 230V G38 CP/73 3200°K 400 hours
6994Z PHILIPS	2000W 230V G38 CP/73 3200°K 400 hours

Specifications

Weight	7Kg manual, 8 Kg pole op
Cable	3m with inline switch manual, 1.5m with P.O.
Lens Diameter	175 mm (6.9")
Reflector	Spherical specular high purity aluminium
Lampholder	G38
Mounting	28mm (1 1/8") spigot
Packed Size	460x400x400 mm
Protection Class	IP 23
Certification	NRTL-US-C, CE, TUV GC, CB

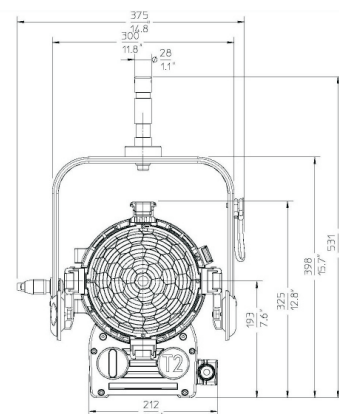

Photometric Data with Lamp CP/73

Throw (m):	6	9	12
Spot:10°	216600 cd		
Output (lux)	6017	2674	1504
Diameter (m)	1.3	1.9	2.5
Medium:30°	67625 cd		
Output (lux)	1878	835	470
Diameter (m)	3.2	4.8	6.4
Flood:54°	34475 cd		
Output (lux)	958	426	239
Diameter (m)	6.5	9.8	13.0

