


# BriteArc "BriteFit"



BriteArc "BriteFit" lamps are metal halide light sources with excellent performance, specially equipped with a bayonet system "BriteFit", for fast and easy replacement.

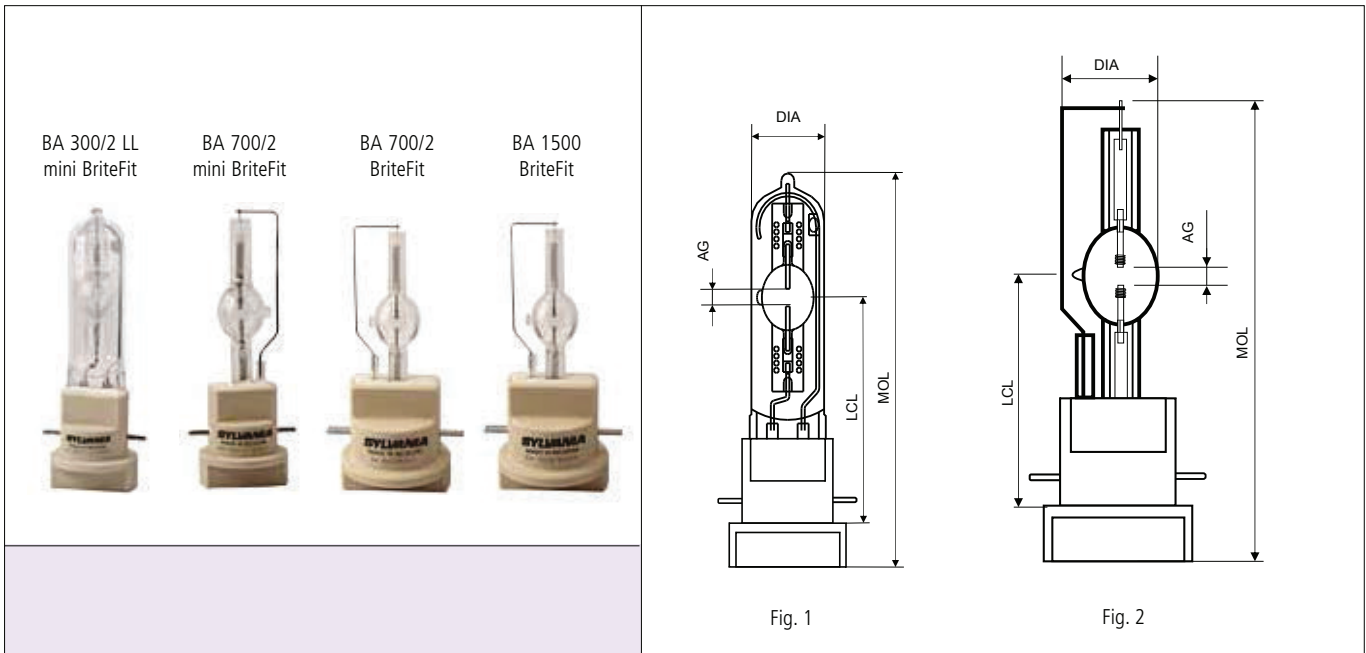

FEATURES	APPLICATIONS	DIRECTIONS FOR USE
<ul style="list-style-type: none"> <li>• Easy replacement system Sylvania BriteFit</li> <li>• No outer bulb : allows reduced lamp dimensions</li> <li>• High luminous efficacy</li> <li>• Low infrared</li> <li>• Very good colour stability and quality</li> <li>• Excellent lumen maintenance</li> <li>• Physical ruggedness</li> </ul>	<ul style="list-style-type: none"> <li>• Show lighting</li> <li>• Theatre</li> <li>• Discotheque lighting</li> <li>• Effect lighting</li> <li>• Studio lighting</li> <li>• Special OEM requests</li> </ul>	<ul style="list-style-type: none"> <li>• Only use in closed fixtures</li> <li>• Can be operated on electronic power supply or on a magnetic ballast</li> <li>• Burning position: universal</li> </ul>

Item Description	Watt	Voltage	Current	Ignition Pulse	Average Life	Replacement Time	Luminous Flux	Colour Temp.	CRI	Total UV-Output
	W	V	A	kV	hrs	hrs	lm	K		W
BA 300/2 MINI BRIFITFIT 8500	300	95	3.8	1.9	750	1000	23000	8400	2a	60
BA 300/2 LL MINI BRIFITFIT 8500	300	95	3.8	1.9	2000	2200	22000	8500	2a	60
<b>BA 575/2 MINI BRIFITFIT 7500</b>	<b>575</b>	<b>95</b>	<b>7</b>	<b>2.5</b>	<b>750</b>	<b>1000</b>	<b>38600</b>	<b>7500</b>	<b>2a</b>	<b>75</b>
BA 700/2 MINI BRIFITFIT 7500	700	70	10.2	2.5	750	1000	50000	7500	2a	100
BA 700 MINI BRIFITFIT DAYLIGHT	1000	82	12.2	2.5	750	850	50000	5600	85	100
BA 700/3 MINI BRIFITFIT 3200	700	70	10.2	2.5	750	1000	50000	3200	1b	100
BA 700/2 BRIFITFIT 7500	700	70	10.2	2.5	750	1000	50000	7500	2a	100
BA 700 BRIFITFIT DAYLIGHT	700	70	10.2	2.5	750	1000	50000	5600	2a	100
BA 700/3 BRIFITFIT 3200	700	70	10.2	2.5	750	1000	50000	3200	1b	100
BA 1000 MEDIUM BRIFITFIT DAYLIGHT	1000	82	12.2	4	750	850	85000	6000	85	130
BA 1000/3 MEDIUM BRIFITFIT 3200K	1000	82	12.2	4	750	850	85000	3200	90	130
BA 1500 BRIFITFIT DAYLIGHT	1500	100	16	3.5	750	1000	135000	6000	1a	200

Item Description	Cap	Dimensions				Max Bulb	Max. pinch	Figure	Packing	Ordering
		MOL mm	AG mm	Dia mm	BBL mm	Temp. °C	Temp. °C	Nr.	Quantity	Code
BA 300/2 MINI BRIFITFIT 8500	PGJX28	122	5	23	67	500	350	1	10	0023805
BA 300/2 LL MINI BRIFITFIT 8500	PGJX28	122	5	23	67	500	350	1	10	0023809
<b>BA 575/2 MINI BRIFITFIT 7500</b>	<b>PGJX28</b>	<b>112</b>	<b>4</b>	<b>23</b>	<b>56</b>	<b>1000</b>	<b>450</b>	<b>2</b>	<b>10</b>	<b>0023812</b>
BA 700/2 MINI BRIFITFIT 7500	PGJX28	112	4	23.2	56	1000	450	2	10	0023800
BA 700 MINI BRIFITFIT DAYLIGHT	PGJX28	112	5.5	23.5	56	1000	450	2	10	0023813
BA 700/3 MINI BRIFITFIT 3200	PGJX50	125	4	23.2	65	1000	450	2	10	0023808
BA 700/2 BRIFITFIT 7500	PGJX50	125	4	23.2	65	1000	450	2	10	0023806
BA 700 BRIFITFIT DAYLIGHT	PGJX50	125	4	23.2	65	1000	450	2	10	0023815
BA 700/3 BRIFITFIT 3200	PGJX28	112	4	23.2	56	1000	450	2	10	0023807
BA 1000 MEDIUM BRIFITFIT DAYLIGHT	PGJX36	112	5.5	26.5	56	1000	450	2	10	0023817
BA 1000/3 MEDIUM BRIFITFIT 3200K	PGJX36	112	5.5	26.5	56	1000	450	2	10	0023818
BA 1500 BRIFITFIT DAYLIGHT	PGJX50	128	5	27	65	1000	450	2	10	0023801